

BATTLETECH™

OMNIMECH RECORD SHEET

'MECH DATA

Type: Osteon Prime

Movement Points:

Walking: 3

Running: 5

Jumping: 0

Engine Type: 255 XL

Tonnage: 85

Tech Base: Clan

Rules Level: Experimental

Role: Juggernaut

WARRIOR DATA

Name: _____

Gunnery Skill: _____ Piloting Skill: _____

Hits Taken	1	2	3	4	5	6
Consciousness #	3	5	7	10	11	Dead

Weapons & Equipment Inventory

(hexes)

Qty	Type	Loc	Ht	Dmg	Min	Sht	Med	Lng
1	Improved ATM 9	LA	6	[M,C,S]				
	Standard			2/Msl	4	5	10	15
	Extended Range			1/Msl	4	9	18	27
	High Explosive			3/Msl	—	3	6	9
1	Improved ATM 9	RA	6	[M,C,S]				
	Standard			2/Msl	4	5	10	15
	Extended Range			1/Msl	4	9	18	27
	High Explosive			3/Msl	—	3	6	9
1	Improved ATM 9	LT	6	[M,C,S]				
	Standard			2/Msl	4	5	10	15
	Extended Range			1/Msl	4	9	18	27
	High Explosive			3/Msl	—	3	6	9
1	Improved ATM 9	RT	6	[M,C,S]				
	Standard			2/Msl	4	5	10	15
	Extended Range			1/Msl	4	9	18	27
	High Explosive			3/Msl	—	3	6	9
1	Nova CEWS	HD	2	[E]	—	—	—	3

Ammo: (iATM 9) 91

BV: 3,073



CRITICAL TABLE

Left Arm (CASE II)

- Shoulder
- Upper Arm Actuator
- Improved ATM 9
- Improved ATM 9
- Improved ATM 9
- Improved ATM 9

1-3

- Ammo (iATM 9) 7
- Ammo (iATM 9) 7
- Ammo (iATM 9) 7
- CASE II
- Ferro-Lamellor
- Ferro-Lamellor

4-6

Left Torso (CASE II)

- XL Fusion Engine
- XL Fusion Engine
- Life Support
- Improved ATM 9
- Improved ATM 9
- Improved ATM 9

1-3

- Improved ATM 9
- Ammo (iATM 9) 7
- Ammo (iATM 9) 7
- CASE II
- Ferro-Lamellor
- Ferro-Lamellor

4-6

Left Leg

- Hip
- Upper Leg Actuator
- Lower Leg Actuator
- Foot Actuator
- Ferro-Lamellor
- Ferro-Lamellor

Head (CASE)

- Sensors
- Sensors
- Nova CEWS
- Ammo (iATM 9) 7
- Ammo (iATM 9) 7
- Ammo (iATM 9) 7

1-3

Center Torso

- XL Fusion Engine
- XL Fusion Engine
- XL Fusion Engine
- Gyro
- Gyro
- Gyro

4-6

- Gyro
- XL Fusion Engine
- XL Fusion Engine
- XL Fusion Engine
- Torso-Mounted Cockpit
- Sensors

Engine Hits ○○○○
Gyro Hits ○○○○
Sensor Hits ○○○○
Life Support ○



Damage Transfer Diagram

Right Arm (CASE II)

- Shoulder
- Upper Arm Actuator
- Improved ATM 9
- Improved ATM 9
- Improved ATM 9
- Improved ATM 9

1-3

- Ammo (iATM 9) 7
- Ammo (iATM 9) 7
- Ammo (iATM 9) 7
- CASE II
- Ferro-Lamellor
- Ferro-Lamellor

4-6

Right Torso (CASE II)

- XL Fusion Engine
- XL Fusion Engine
- Life Support
- Improved ATM 9
- Improved ATM 9
- Improved ATM 9

1-3

- Improved ATM 9
- Ammo (iATM 9) 7
- Ammo (iATM 9) 7
- CASE II
- Ferro-Lamellor
- Ferro-Lamellor


4-6

Right Leg

- Hip
- Upper Leg Actuator
- Lower Leg Actuator
- Foot Actuator
- Ferro-Lamellor
- Ferro-Lamellor


ARMOR DIAGRAM

Ferro-Lamellor

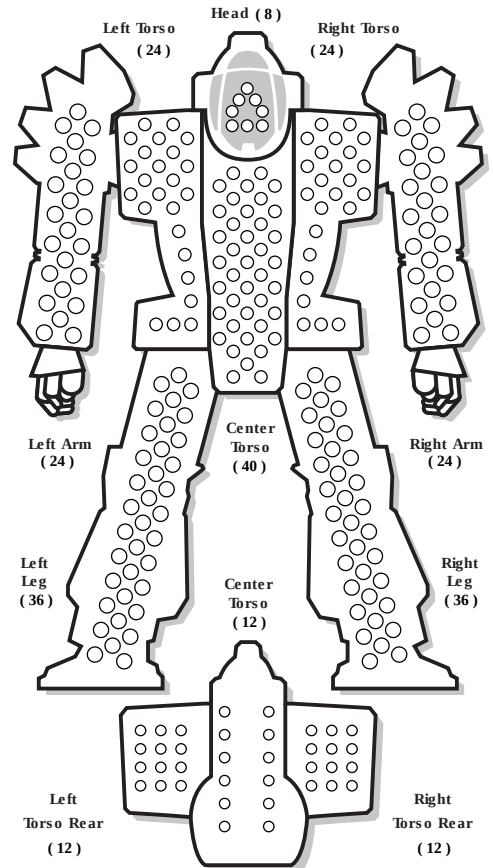

INTERNAL STRUCTURE DIAGRAM

Reinforced

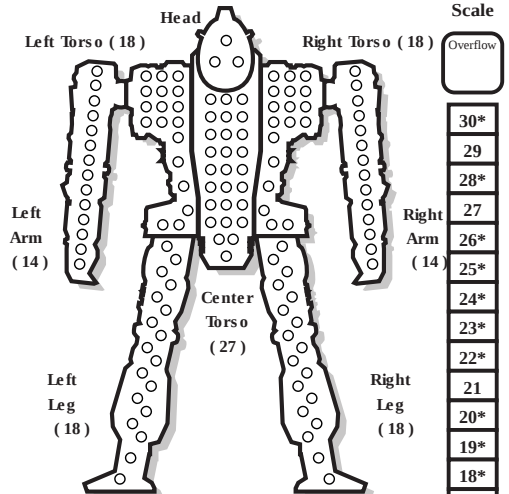

HEAT DATA

Heat Level*	Effects	Double Heat Sinks: 10 (20)
30	Shutdown	○
28	Ammo Exp, avoid on 8+	○
26	Shutdown, avoid on 10+	○
25	-5 Movement Points	○
24	+4 Modifier to Fire	○
23	Ammo Exp, avoid on 6+	○
22	Shutdown, avoid on 8+	○
20	-4 Movement Points	○
19	Ammo Exp, avoid on 4+	○
18	Shutdown, avoid on 6+	○
17	+3 Modifier to Fire	○
15	-3 Movement Points	○
14	Shutdown, avoid on 4+	○
13	+2 Modifier to Fire	○
10	-2 Movement Points	○
8	+1 Modifier to Fire	○
5	-1 Movement Points	○

Heat Scale

Overflow

30*
29
28*
27
26*
25*
24*
23*
22*
21
20*
19*
18*
17*
16
15*
14*
13*
12
11
10*
9
8*
7
6
5*
4
3
2
1
0